

IP Series

IP Series Slim appearance,multiple installation and form changeable.Variable installations: hanging, wall mounting, splicing.It can be controlled by laptop,mobile phone,cloud platform remote control.Ideal for events,such as shopping mall,retail store,conference room,exhibition,and wedding.



Ultra slim & lightweight

Ultra slim edge, display thickness only 45mm
Net weight only 48kg with the base




Easy transportation

Stand base for default, bracket is for option
Wheels is easy for transportation



Multiple installation method

Stand alone, hanging, wall-mounting
Support multiple posters splicing

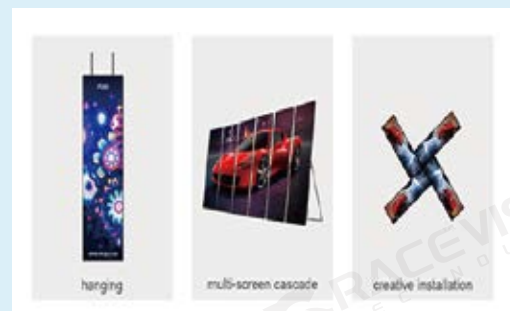

Excellent display effect

3840Hz refresh rate
160degree wide viewing angle
high contrast ratio

Specification:

Model	IP-1.2	IP-1.5	IP-1.8	IP-2.5
Physical Pitch	1.25mm/0.05"	1.538mm/0.06"	1.86mm/0.07"	2.5mm/0.1"
Pixel Configuration	SMD1010	SMD1212	SMD1515	SMD2121
Pixel Density	640000px/m ²	422753px/m ²	289050px/m ²	160000px/m ²
Module Dimension(WxH)	320x160mm/12.59"x6.29"			
Panel Dimension(WxHxD)	640x1920x35mm/25.19"x75.59"x1.37"			
No. of Module/panel(WxH)	2x12			
Module Resolution	256x128px	208x104px	172x86px	128x64px
Panel Resolution	512x1536px	416x1248px	344x1032px	256x768px
Panel Material	Aluminum			
Panel Weight	48kg(105.82lbs)			
Gray Scale	16bit			
Contrast Ratio	4000:1			
Avg. Power Consumption	200w/panel	200w/panel	200w/panel	160w/panel
Max. Power Consumption	600w/panel	600w/panel	600w/panel	480w/panel
Operating Temp/Humidity	-10°C - 60°C / 10% - 60%			
Storage Temp/Humidity	-30°C - 60°C / 10% - 60%			
Refresh Rate	3840hz			
Brightness	>=600nits			
Viewing Angle(H/V)	160°/140°			
Expected Lifetime	100,000hrs			
Service	Rear			
IP Rating(Front/Rear)	IP40/IP21			
Certification	CCC,CE,ETL,RoHS			

