



TSR Series

TSR Series offers a modern, dynamic, and visually captivating solution for a wide range of events. With features like high transparency, front and back maintenance, lightweight portability, and vivid content display, it stands out in any environment. Perfect for shopping malls, retail markets, corporate events, concerts, and stage productions.

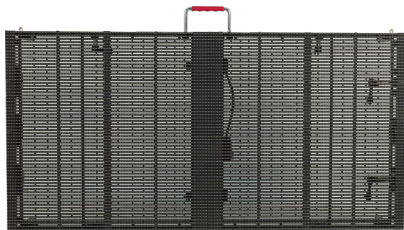

Ultra thin, lightweight & silent

35~45mm thickness
14kg per square meter
Easy for installation and maintenance



High transparency and concise

35% transparency rate
Variable brightness adjust for day and night



Customizable & versatile

Unlimited orientation, highly customizable
Suitable for any size and shape
Convex, concave, wave, cylindrical,
fit any indoor architectural structures

Model	TSR-3.9-7.8-1	TSR-3.9-7.8-2	TSR-3.9-7.8-3	TSR-3.9-7.8-4	TSR-3.9-7.8-5
Physical Pitch	3.9-7.8mm	3.9-7.8mm	3.9-7.8mm	3.9-7.8mm	3.9-7.8mm
Pixel Configuration	SMD2121	SMD2121	SMD1921	SMD1921	SMD1921
Pixel Density	32256px/m ²				
Module Dimension(WxH)	500x125mm				
Panel Dimension(WxHxD)	1000x500mm				
No. of Module/panel(WxH)	2x4				
Module Resolution	128x16px				
Panel Resolution	256x64px				
Panel Material	Aluminum alloy				
Panel Weight	<14kg/m ²				
Gray Scale	16bit				
Contrast Ratio	2000:1				
Avg. Power Consumption	180w/m ²	180w/m ²	180w/m ²	180w/m ²	180w/m ²
Max. Power Consumption	560w/m ²	560w/m ²	560w/m ²	560w/m ²	560w/m ²
Operating Temp/Humidity	-10°C - 60°C / 10% - 60%				
Storage Temp/Humidity	-30°C - 60°C / 10% - 60%				
Refresh Rate	3840hz				
Brightness	600nits	1200nits	1800nits	2500nits	4000nits
Viewing Angle(H/V)	160°/140°				
Expected Lifetime	100,000hrs				
Service	Rear				
IP Rating(Front/Rear)	IP30				
Certification	CCC,CE,ETL,RoHS				

