


TSR Series

TSR Series offers a modern, dynamic, and visually captivating solution for a wide range of events. It boasts an unmatched display quality with a brightness of 5000nits, 16-bit greyscale, and a refresh rate of 7680Hz, engaging the audience with its vibrant imagery and exceptional performance.



Ultra thin, lightweight & silent

75mm, 9KG per panel, remarkably user-friendly. Experience a new era of visual technology with our innovative transparent displays.

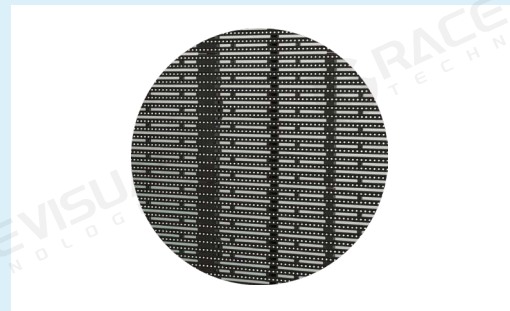


High transparency and concise

With a light transmittance of up to 50%, it offers excellent self-cooling performance, eliminating the need for air conditioning.



Collision Protection

The TSR series LED panel has 4 corner protectors to avoid LEDs broken during installation and transportation

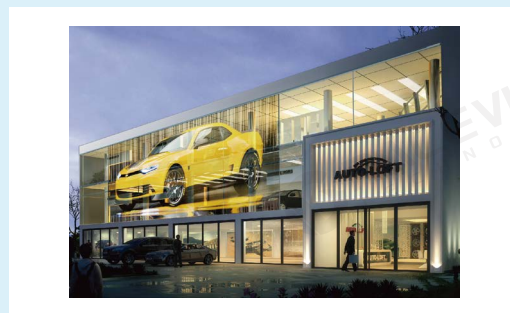

Customizable & versatile

Products can be flexibly customized according to the actual installation site.

Specification:

Model	TSR-3.9-7.8
Physical Pitch	3.9-7.8mm/0.15"-0.30"
Pixel Configuration	SMD1921
Pixel Density	32768px/m ²
Module Dimension(WxH)	500x125mm/19.68"x4.92"
Panel Dimension(WxHxD)	500x1000mm/19.68"x39.37"
No. of Module/panel(WxH)	1x8
Module Resolution	128x16px
Panel Resolution	128x128px
Panel Material	Aluminum alloy
Panel Weight	9KG per panel(19.85lbs)
Gray Scale	16bit
Contrast Ratio	6000:1
Avg. Power Consumption	180w/m ²
Max. Power Consumption	560w/m ²
Operating Temp/Humidity	-10°C - 60°C / 10% - 60%
Storage Temp/Humidity	-30°C - 60°C / 10% - 60%
Refresh Rate	7680hz
Brightness	5000nits
Viewing Angle(H/V)	160°/140°
Expected Lifetime	100,000hrs
Service	Rear
IP Rating(Front/Rear)	IP65
Certification	CCC,CE,ETL,RoHS

