

FX Series

FX Series are suitable for exhibition halls, retail stores booths, and commercial spaces.
The slim appearance and magnetic system adaptable for any scenario



Seamless
Splicing




Magnet



Curved




Low Energy



Multiple Pixels, Hyper Vision

Different Pixel Option: 1.25mm, 1.53mm, 1.86mm, 2mm, 2.5mm


High Refresh Rate: 7680Hz for smooth and clear visuals

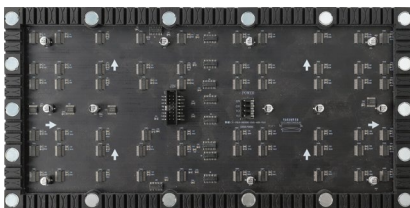

Module Design, Easy Installation

Magnetic Design: Supports creative shapes and enables fast installation


Front Maintenance: Easy to install and replace from the front




Magnetic Module



Soft FPC & PCB



GOB-Tech

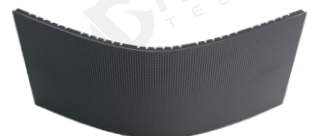

Front Maintenance

Specification:

Model	FX-1.25	FX-1.53	FX-1.86	FX-2	FX-2.5
Physical Pitch	1.25mm/0.05"	1.538mm/0.06	1.86mm/0.07"	2mm/0.08"	2.5mm/0.1"
Pixel Configuration	SMD1010	SMD1212	SMD1515	SMD1515	SMD2121
Pixel Density	640000px/m ²	422500px/m ²	289000px/m ²	250000px/m ²	160000px/m ²
Module Dimension(WxH)	320x160mm/12.59"x6.29"				
Module Resolution	256x128px	208x104px	172x86px	160x80px	128x64px
Panel Resolution	512x384px	416x312px	344x258px	320x240px	256x192px
Gray Scale	16bit				
Contrast Ratio	4000:1				
Operating Temp/Humidity	-10°C - 60°C / 10% - 60%				
Storage Temp/Humidity	-30°C - 60°C / 10% - 60%				
Refresh Rate	7680hz				
Brightness	600~800nits				
Viewing Angle(H/V)	160°/140°				
Expected Lifetime	100,000hrs				
Service	Front				
IP Rating(Front/Rear)	IP40/IP21				
Certification	CCC,CE,ETL,RoHS				

