

ORD Series

Premium led panel for outdoor rental & stage application.

Multiple pixel pitch for option, 2.6mm, 2.9mm, 3.9mm

Realize the splicing of four different types of led wall.



Seamless Splicing



Magnet




Curved



Low Energy



IP 65

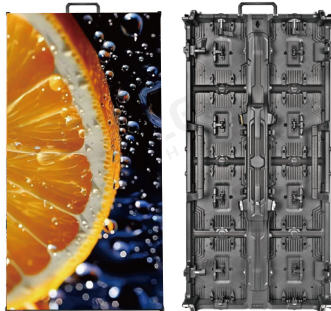


Quick Setup, Front and Rear Service

Auto-Locking Design – Quick and secure setup

Front & Rear Maintenance – Provides easy access for efficient servicing


Detachable Power Box Design – Plug-and-play for quick assembly and disassembly

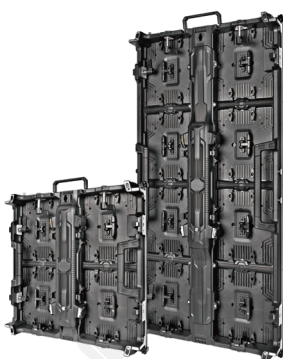

Modular Design, Versatile Connectivity

Modular & Lightweight Design – Easy to transport, set up, and customize for any space


Seamless Connectivity -Realize the splice of Flat, Curved, Right-angle and Flexible panels



Auto-Lock Function



Detachable Power Box



Magnetic Module



Corner Protection

Specification:

Model	ORD-2.6	ORD-2.9	ORD-3.9	ORD-4.8
Physical Pitch	2.6mm/0.1"	2.97mm/0.12"	3.91mm/0.15"	4.81mm/0.18"
Pixel Configuration	SMD1415	SMD1415	SMD1415	SMD1921
Pixel Density	147456px/m ²	112896px/m ²	65536px/m ²	43264px/m ²
Module Dimension(WxH)	250x250mm/ 9.84"x9.84"			
Panel Dimension(WxHxD)	500x500x83mm (19.68"x19.68"x3.26") / 500x1000x83mm(19.68"x39.37"x3.26")			
No. of Module/panel(WxH)	2x2/2x4			
Module Resolution	96x96px	64x64px	64x64px	52x52px
Panel Resolution	192x192px 192x384px	128x128px 128x256px	128x128px 128x256px	104x104px 104x208px
Panel Material	Die-casting Aluminum			
Panel Weight	6kg/10.4kg(13.22lbs/22.92lbs)			
Gray Scale	16bit			
Contrast Ratio	4000:1			
Avg. Power Consumption	64w/panel / 128w/panel			
Max. Power Consumption	192w/panel / 384w/panel			
Operating Temp/Humidity	-10°C - 60°C / 10% - 60%			
Storage Temp/Humidity	-30°C - 60°C / 10% - 60%			
Refresh Rate	7680hz			
Brightness	≥4500nits			
Viewing Angle(H/V)	160°/140°			
Expected Lifetime	100,000hrs			
Max. Stacking/Hanging	20/10 panels			
Service	Front/Rear			
IP Rating(Front/Rear)	IP65/IP54			
Certification	CCC,CE,ETL,RoHS			

